

Spring Vibration Isolator



General Specification

Unless otherwise noted on the equipment schedule, all mechanical equipment (fans) shall be mounted on vibration isolators to prevent the transmission of vibration and mechanical transmitted sound to the building structure. Vibration isolators shall be selected in accordance with the weight distribution so as to produce reasonably uniform deflection.


Kruger Spring Vibration Isolator is design of free-standing, laterally stable without any house, single steel spring specially design to use with Kruger fan series.

Consist of spring mounting caps assembled with level adjustment bolts and locking screws, steel spring and molded non-skid neoprene base is available with 25 mm deflection type (SBA Series) and 50 mm deflection type (SBB Series).


Application

Kruger spring vibration isolator is recommended for use to isolating floor mounting sources of noise and vibration located near critically quiet area. They are typically used to reduce the transmission of noise and vibration from low speed mechanical equipments (fans) into a building structure.

Typical Installation




Centrifugal fan




Axial fan

Deflection

Deflection is the change in a flexible element's unloaded to loaded height.

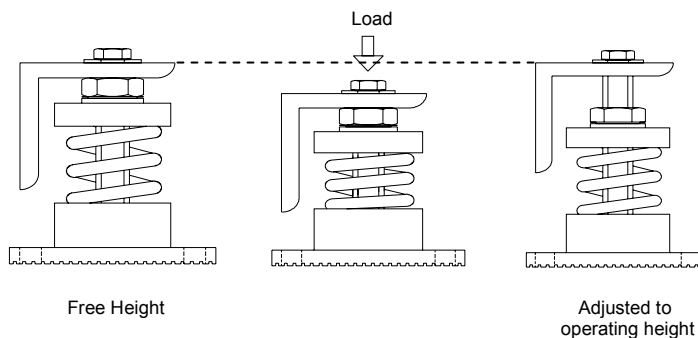


25mm Deflection Type

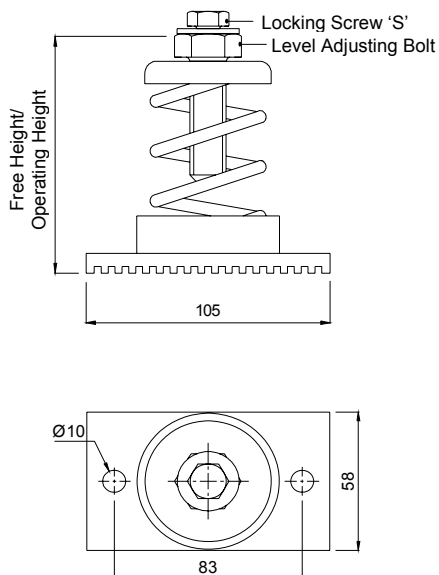


Model	Rated Load		Spring Rated (kg/mm)	Dimension (mm)		
	(kg)	(lbs)		Free Height/ Opt. Height	Spring O.D.	S
SBA-A03	3	6.6	0.12	95	Ø 51	M10 x 25
SBA-A04	4	8.8	0.16	95	Ø 51	M10 x 25
SBA-A05	5	11.0	0.20	95	Ø 51	M10 x 25
SBA-A06	6	13.2	0.24	95	Ø 51	M10 x 25
SBA-A08	8	17.6	0.32	95	Ø 51	M10 x 25
SBA-A10	10	22.0	0.40	95	Ø 51	M10 x 25
SBA-A13	13	28.6	0.52	95	Ø 51	M10 x 25
SBA-A16	16	35.2	0.64	95	Ø 51	M10 x 25
SBA-A20	20	44.0	0.80	95	Ø 51	M10 x 25
SBA-A25	25	55.0	1.00	95	Ø 51	M10 x 25
SBA-A32	32	70.4	1.28	95	Ø 51	M10 x 25
SBA-A40	40	88	1.60	95	Ø 51	M10 x 25
SBA-A50	50	110	2.00	95	Ø 51	M10 x 25
SBA-A63	63	138.6	2.52	95	Ø 51	M10 x 25
SBA-A80	80	176	3.20	95	Ø 51	M10 x 25
SBA-A100	100	220	4.00	95	Ø 51	M10 x 25
SBA-A125	125	275	5.00	95	Ø 51	M10 x 25
SBA-A160	160	352	6.40	95	Ø 51	M10 x 25
SBA-A200	200	440	8.00	95	Ø 51	M10 x 25

25mm Deflection Type

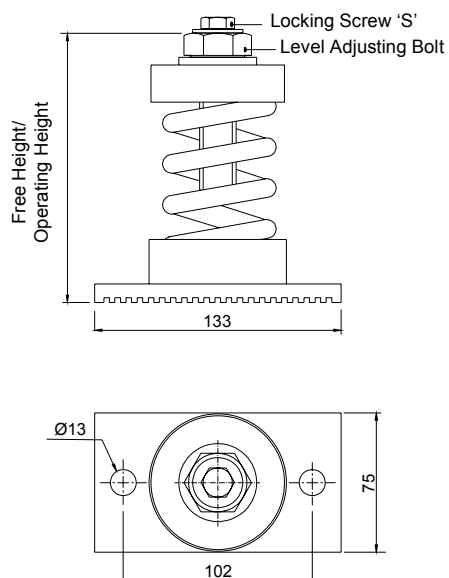


Model	Rated Load		Spring Rated (kg/mm)	Dimension (mm)		
	(kg)	(lbs)		Free Height/ Opt. Height	Spring O.D.	S
SBA-B13	13	28.6	0.52	145	Ø 60.3	M10 x 25
SBA-B16	16	35.2	0.64	145	Ø 60.3	M10 x 25
SBA-B20	20	44.0	0.80	145	Ø 60.3	M10 x 25
SBA-B25	25	55.0	1.00	145	Ø 60.3	M10 x 25
SBA-B32	32	70.4	1.28	145	Ø 60.3	M10 x 25
SBA-B40	40	88.0	1.60	145	Ø 60.3	M10 x 25
SBA-B50	50	110	2.00	145	Ø 60.3	M10 x 25
SBA-B63	63	138.6	2.52	145	Ø 60.3	M10 x 25
SBA-B80	80	176	3.2	145	Ø 60.3	M10 x 25
SBA-B100	100	220	4.0	145	Ø 60.3	M10 x 25
SBA-B125	125	275	5.0	145	Ø 60.3	M10 x 25
SBA-B160	160	352	6.4	145	Ø 60.3	M10 x 25
SBA-B200	200	440	8.0	145	Ø 60.3	M10 x 25
SBA-B250	250	550	10.0	145	Ø 60.3	M10 x 25
SBA-B315	315	693	12.6	145	Ø 60.3	M10 x 25
SBA-B400	400	880	16.0	145	Ø 60.3	M10 x 25
SBA-B500	500	1100	20.0	145	Ø 60.3	M10 x 25
SBA-B630	630	1386	25.2	145	Ø 60.3	M10 x 25

50mm Deflection Type

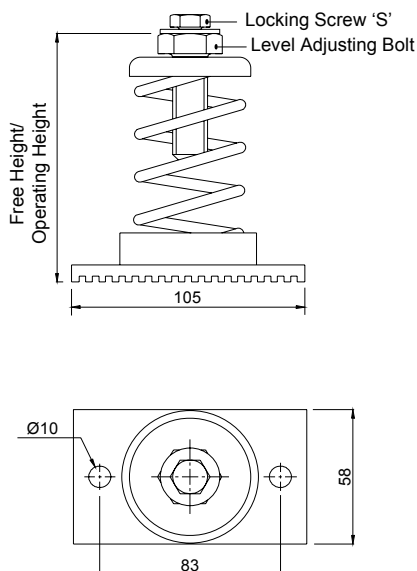

Model	Rated Load		Spring Rated (kg/mm)	Dimension (mm)		
	(kg)	(lbs)		Free Height/ Opt. Height	Spring O.D.	S
SBB-A06	6	13.2	0.12	120	Ø 51	M10 x 25
SBB-A08	8	17.6	0.16	120	Ø 51	M10 x 25
SBB-A10	10	22.0	0.20	120	Ø 51	M10 x 25
SBB-A13	13	28.6	0.26	120	Ø 51	M10 x 25
SBB-A16	16	35.2	0.32	120	Ø 51	M10 x 25
SBB-A20	20	44.0	0.40	120	Ø 51	M10 x 25
SBB-A25	25	55.0	0.50	120	Ø 51	M10 x 25
SBB-A32	32	70.4	0.64	120	Ø 51	M10 x 25
SBB-A40	40	88	0.80	120	Ø 51	M10 x 25
SBB-A50	50	110	1.00	120	Ø 51	M10 x 25
SBB-A63	63	138.6	1.26	120	Ø 51	M10 x 25
SBB-A80	80	176	1.60	120	Ø 51	M10 x 25
SBB-A100	100	220	2.00	120	Ø 51	M10 x 25

50mm Deflection Type

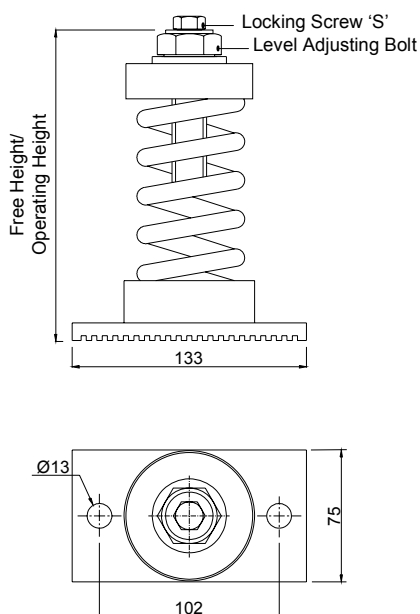

Model	Rated Load		Spring Rated (kg/mm)	Dimension (mm)		
	(kg)	(lbs)		Free Height/ Opt. Height	Spring O.D.	S
SBB-B32	32	70.4	0.64	155	Ø 60.3	M10 x 25
SBB-B40	40	88.0	0.80	155	Ø 60.3	M10 x 25
SBB-B50	50	110	1.00	155	Ø 60.3	M10 x 25
SBB-B63	63	138.6	1.26	155	Ø 60.3	M10 x 25
SBB-B80	80	176	1.60	155	Ø 60.3	M10 x 25
SBB-B100	100	220	2.0	155	Ø 60.3	M10 x 25
SBB-B125	125	275	2.5	155	Ø 60.3	M10 x 25
SBB-B160	160	352	3.2	155	Ø 60.3	M10 x 25
SBB-B200	200	440	4.0	155	Ø 60.3	M10 x 25
SBB-B250	250	550	5.0	155	Ø 60.3	M10 x 25
SBB-B315	315	693	6.3	155	Ø 60.3	M10 x 25
SBB-B400	400	880	8.0	155	Ø 60.3	M10 x 25
SBB-B500	500	1100	10.0	155	Ø 60.3	M10 x 25
SBB-B630	630	1386	12.6	155	Ø 60.3	M10 x 25