


Copper-Bonded Ground Rod (508 micron)



Copper-Bonded Ground Rod is made by molecularly bonding pure electrolytic copper onto a low carbon, high tensile steel core with exceeding 0.508 mm (508 micron) thick. The material made of 99.9% pure electrolytic copper with high tensile steel. To ensure in safety and quality, it meets UL and IEC standard for grounding and bonding equipments.

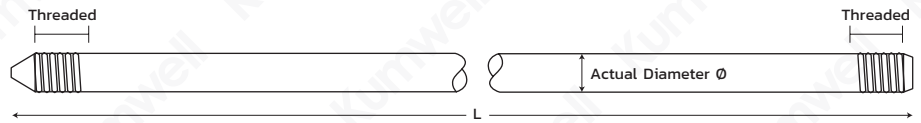

Threaded Type

Code No.	Nominal Diameter (Ø) (in)	Actual Diameter (Ø) (mm)	Threaded Size (in)	Length (ft)	Weight (kg)
GRCBT508 124	1/2	13.2	1/2	4	4.26
GRCBT508 126	1/2	13.2	1/2	6	6.40
GRCBT508 128	1/2	13.2	1/2	8	2.71
GRCBT508 1210	1/2	13.2	1/2	10	3.39
GRCBT508 584	5/8	14.6	5/8	4	1.65
GRCBT508 586	5/8	14.6	5/8	6	2.48
GRCBT508 588	5/8	14.6	5/8	8	3.30
GRCBT508 5810	5/8	14.6	5/8	10	4.14
GRCBT508 344	3/4	17.6	3/4	4	2.38
GRCBT508 346	3/4	17.6	3/4	6	3.57
GRCBT508 348	3/4	17.6	3/4	8	4.79
GRCBT508 3410	3/4	17.6	3/4	10	6.00
GRCBT508 14	1	23.6	1	4	4.26
GRCBT508 16	1	23.6	1	6	6.40
GRCBT508 18	1	23.6	1	8	8.57
GRCBT508 110	1	23.6	1	10	10.74



Material
High tensile strength steel
Copper purity > 99.9%



Tested Standard
IEC 62561 Part 2
UL 467



Application
Suitable for disperse current into the earth
to extend the length of ground rod by coupling.

Note : Special Size, Diameter, Length Copper thickness can be requested.