


## Copper-Bonded Ground Rod (254 micron)



Copper-Bonded Ground Rod is made by molecularly bonding pure electrolytic copper onto a low carbon, high tensile steel core with exceeding 0.254 mm (254 micron) thick. The material made of 99.9% pure electrolytic copper with high tensile steel. To ensure in safety and quality, it meets UL and IEC standard for grounding and bonding equipments.

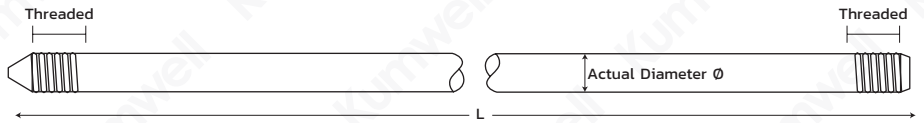

### Threaded Type (UL-Listed)

Code No.	Nominal Diameter (Ø) (in)	Actual Diameter (Ø) (mm)	Threaded Size (in)	Length (ft)	Weight (kg)
GRCBUT 128	1/2	12.7	1/2	8	2.47
GRCBUT 1210	1/2	12.7	1/2	10	3.08
GRCBUT 588	5/8	14.2	5/8	8	3.08
GRCBUT 5810	5/8	14.2	5/8	10	3.80
GRCBUT 348	3/4	17.2	3/4	8	4.46
GRCBUT 3410	3/4	17.2	3/4	10	5.58
GRCBUT 18	1	23.1	1	8	8.25
GRCBUT 110	1	23.1	1	10	10.15

### Threaded Type

Code No.	Nominal Diameter (Ø) (in)	Actual Diameter (Ø) (mm)	Threaded Size (in)	Length (ft)	Weight (kg)
GRCBUT 124	1/2	12.7	1/2	4	1.23
GRCBUT 126	1/2	12.7	1/2	6	1.85
GRCBUT 584	5/8	14.2	5/8	4	1.54
GRCBUT 586	5/8	14.2	5/8	6	2.31
GRCBUT 344	3/4	17.2	3/4	4	2.23
GRCBUT 346	3/4	17.2	3/4	6	3.35
GRCBUT 14	1	23.1	1	4	4.12
GRCBUT 16	1	23.1	1	6	6.09



**Material**  
High tensile strength steel  
Copper purity > 99.9%



**Tested Standard**  
IEC 62561 Part 2  
UL 467



**Application**  
Suitable for disperse current into the earth  
to extend the length of ground rod by coupling.



**Certified Mark**  
UL

**Note :** Special Size, Diameter, Length Copper thickness can be requested.