



Ground Plate


Lattice Copper

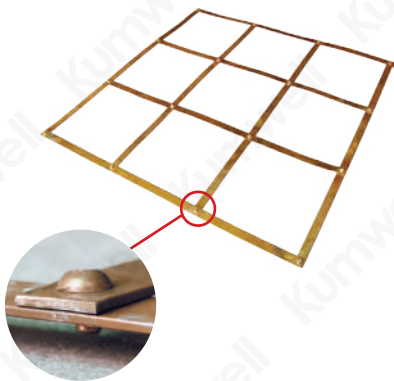

Code No.	Dimensions (mm)	Weight (kg)
GRPL 663	600x600x3	4.20
GRPL 993	900x900x3	7.20

 **Material**
Copper - BS EN 13601


 **Tested Standard**
IEC 62561 Part 2
TIS 3024 Part 2

 **Application**
To minimize the danger of exposure to high step and touch voltages.


Solid Copper



Code No.	Dimensions (mm)	Weight (kg)
GRPS 6615	600x600x15	4.84
GRPS 6630	600x600x3	9.68
GRPS 9915	900x900x15	10.88
GRPS 9930	900x900x3	21.77

 **Material**
Copper - BS EN 13601


 **Tested Standard**
IEC 62561 Part 2
TIS 3024 Part 2

 **Application**
Suitable for an area where unable to drive ground rod.


Copper-Bonded Steel




Code No.	Dimensions (mm)	Weight (kg)
GRPC 6615	600x600x15	4.25
GRPC 6630	600x600x3	8.50


 **Material**
Copper-Bonded steel 254 micron
Copper thickness

 **Tested Standard**
IEC 62561 Part 2
TIS 3024 Part 2

 **Application**
Suitable for an area where unable to drive ground rod.

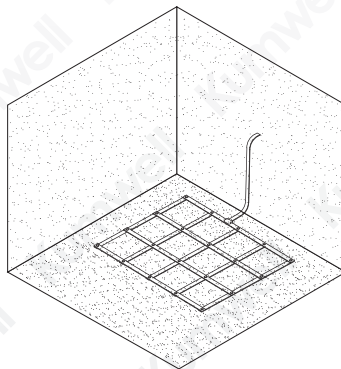


For Lattice Copper

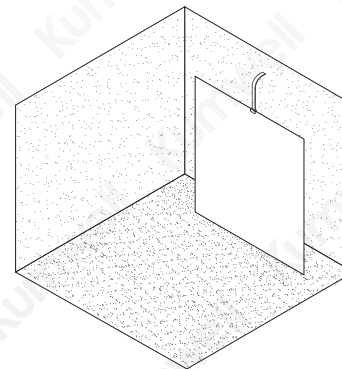

For Copper Plate

Signal Reference Ground Grid

SRG Comply to IEEE Std.1100

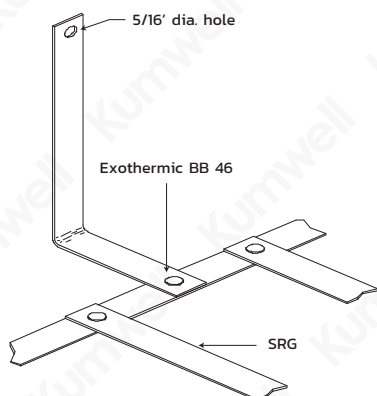

Code No.	Length (L) (mm)	Width (W) (mm)	Spacing (mm)	Weight (kg)
GRSRG 240240	2400	2400	600	6.20
GRSRG 240480	2400	4800	600	11.66



Material
Copper - BS EN 13601




Tested Standard
IEC 62561 Part 1
TIS 3024 Part 1
(For Connection Joint)



Application
To minimize the danger of exposure to high step and touch voltages suitable for data center.

Kumwell Exothermic Welding Code BB46-C-500.5 mould and KW32 metal powder can provide Tee, Cross, L-Shape and Splice connections as shown.

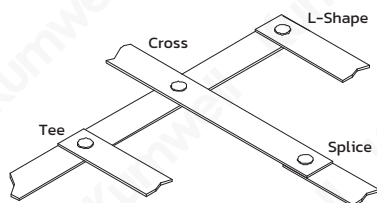



Mould	Copper Strip Size (mm)	Metal Powder (g)	Handle Clamp Type
BB46-C-500.5	50x0.5	32	HCC00



Application
Using for Exothermic welding to provide Tee, Cross, L-Shape and Splice connections.



Tested Standard
UL 467

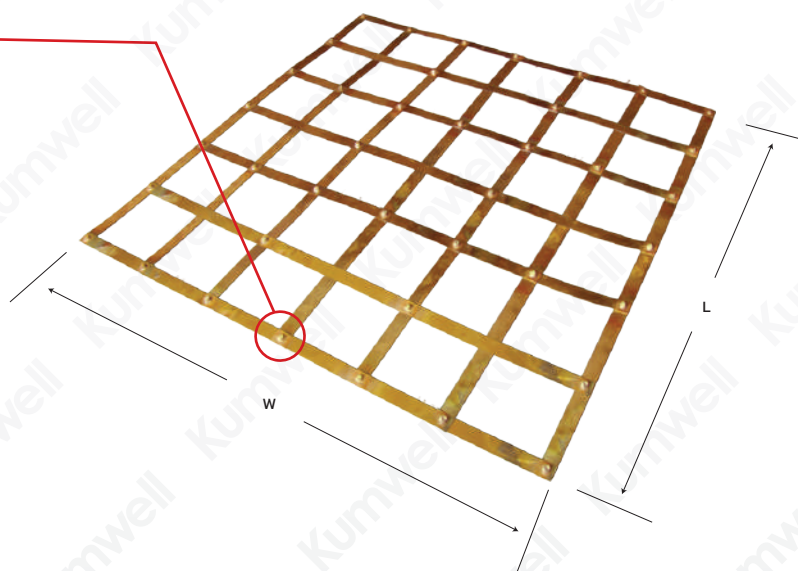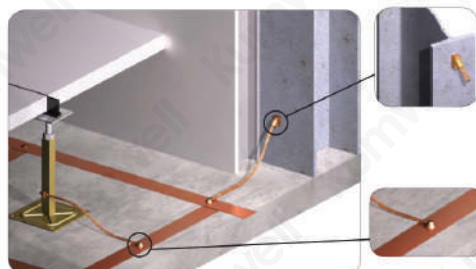

Note : Special Size can be requested.